


Product information

Unique dot-free design with high lumen output creates a visually appealing lighting solution without the need for aluminum profiles and PC covers. Slim size in 4mm width specially for narrow lighting applications. Effective heat dissipation mechanism helps prolong the lifespan of the LED chips and maintain the lighting performance over time.

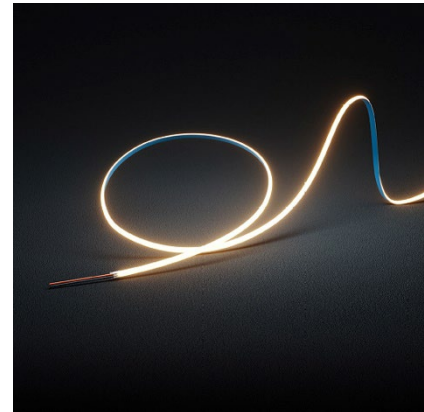


Specifications

| | |
|---------------------|---------------------|
| Voltage | DC24V |
| Max current/LED | 3.4mA |
| Length | 100cm |
| Max run length | 5M |
| Width x Height | 4mm x 2mm |
| Unit cut | 50mm |
| Power | 3W/m |
| Colour temperature | 2700K |
| Beam angle | 120° |
| IP class | IP20 |
| Ambient temperature | -25°c to + 60°c |
| LED type, quantity | COB, 480LED/m |
| CRI | 90+ |
| Lifetime | >54.000 hours (L70) |
| Dimmable | Yes |
| Certificates | CE, RoHS |
| Warranty | 5 years |




Used electrical and electronic products, including all types of batteries, must be delivered for recycling at a separate collection point. (acc. to directive 2012/19/EU and 2006/66/EC).

Illustration

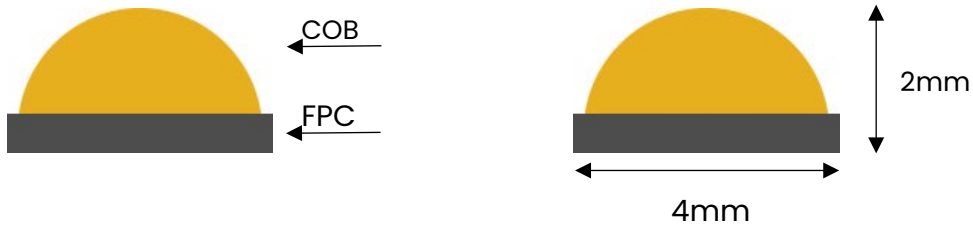

Wiring

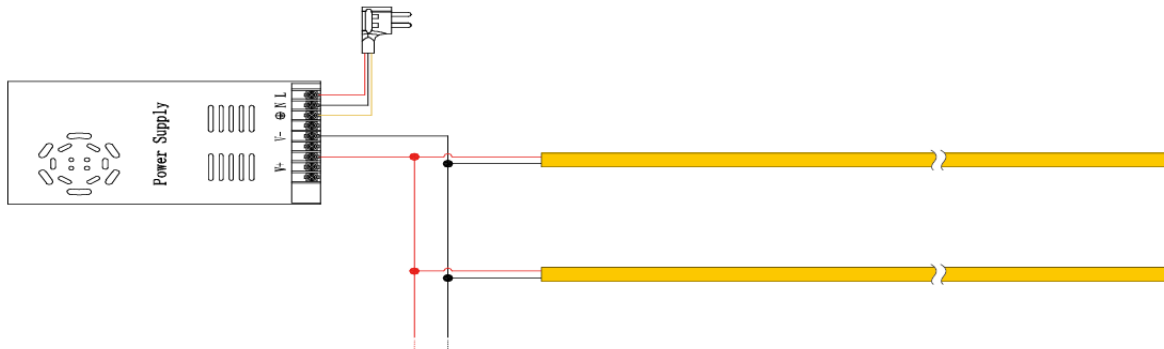

- Max. connection length depends on the wattage of the power supply and LED strip.
- Max. length per circuit is 5m, if it exceeds 5m, please split into multiple circuits.