

LEDLINE FLEX 1010 5M Neon 24V

Part nr: 110025

ENG

Product information

LEDLINE FLEX 1010 has a vertical bending with diameter of 150mm. 3-side emitting design provides a wider beam angle for a more uniform and extensive lighting effect.

IP68 protection by full Polyurethane coating, UV resistance, and solvents resistance ensure the durability in various environments.

Equipped with a 2-Step MacAdam bin and dot free lighting technology ensures exceptional lighting performance.



Specifications

Voltage	DC24V
Length	5 meters
Max run length	12M
Width x Height	10mm x 10mm
Unit cut	41,67 mm
Power	10W/m
Colour temperature	2700K
Lumen	715 lm/m
Beam angle	3-side emitting
IP class	IP68
Ambient temperature	-25°c to + 50°c
LED type, quantity	Neon, 144 LED/m
CRI	>90
Lifetime	>54.000 hours (L70)
Dimmable	Yes
Certificates	CE, RoHS
Warranty	5 years




Used electrical and electronic products, including all types of batteries, must be delivered for recycling at a separate collection point. (acc. to directive 2012/19/EU and 2006/66/EC).

LEDLINE FLEX 1010 5M Neon 24V


Part nr: 110025

ENG

Illustration

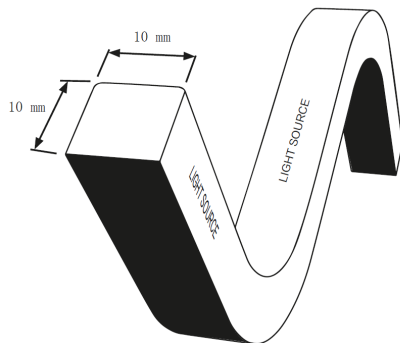

Wiring

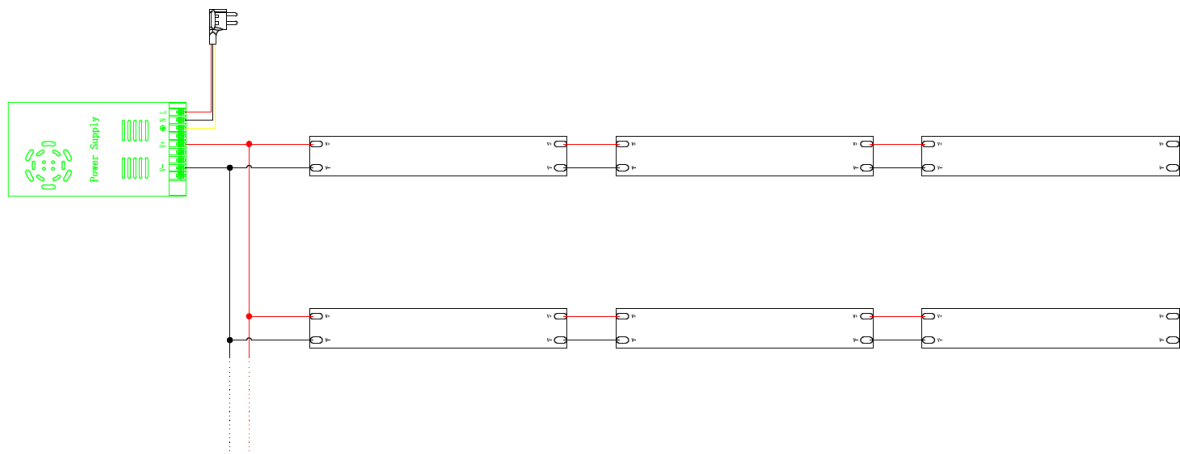

- Maximum single run length 10W/M - 12M Max. Single Run Length. The Strip is 5m/reel.